



VECTRON
INTERNATIONAL
A DOVER COMPANY

OX-205-0001-100M000000

Preliminary

Ultra Low Phase Noise
Oven Controlled Crystal Oscillator

Helping Customers Innovate, Improve & Grow



OX-205

Features

- -135 dBc/ Hz at 100 Hz offset
- -172 dBc/Hz at 10 kHz offset
- 100 MHz standard, other frequencies available
- Compact 1" x 1" hermetic enclosure

Applications

- Instrumentation and Test Equipment


Performance Specifications

Phase Noise at 100 MHz					
Frequency Offset (Hz)			Max	Unit	Condition
10			-105	dBc/Hz	Maximum values All EFC settings
100			-135	dBc/Hz	
1000			-162	dBc/Hz	
10,000			-172	dBc/Hz	
100,000			-175	dBc/Hz	
Frequency Stabilities at 100 MHz					
Parameter	Min	Typical	Max	Unit	Condition
vs. operating temperature range	-200		+200	ppb	-40 to +85C (referenced to +25°C)
vs. Initial Tolerance	-500		+500	ppb	at time of shipment and 5V efc
Allan Deviation			5	E-11	0.1 to 1 second tau
vs. supply voltage change	-5		+5	ppb	±1% change
vs. load change	-10		+10	ppb	5% change in load
vs. aging / 1 day	-5		+5	ppb	after 7 days of operation
vs. aging / 1 st year	-500		+500	ppb	after 7 days of operation
vs. aging / 10 year	-1.5		+1.5	ppm	
Warm up time			5	minutes	to ±100 ppb of 2-hour frequency @+25°C

Performance Specifications

Supply Voltage (Vs)					
Parameter	Min	Typical	Max	Unit	Condition
Supply Voltage	11.4	12.0	12.6	VDC	
Power Consumption			4.0 1.5	Watts Watts	during warm-up steady state @ +25°C
Reference Voltage		10		VDC	
RF Output					
Signal	Sinewave				
Load		50		Ohms	
Output Power	+7.0		+13.0	dBm	50 Ohm load
Harmonics			-30	dBc	50 Ohm load
Spurious			-80	dBc	50 Ohm load
Frequency Tuning (EFC)					
Tuning Range	±1		±2	ppm	enough for aging over lifetime
Linearity			20	%	
Tuning Slope	Positive				
Control Voltage Range	0		10	VDC	
Input Impedance		20		kOhm	
Modulation Bandwidth	150			Hz	
Additional Parameters					
g- Sensitivity			1	ppb/g	worst axis
Weight			20	grams	
Absolute Maximum Ratings					
Parameter	Min	Typical	Max	Unit	Condition
Supply Voltage (Vs)			15	V	
Output Load			25	Ohms	
Operable Temperature Range	-55		+95	°C	Device will not sustain damage when operated at temperatures between the operating range and the operable range, but will not be specification compliant
Environmental and Product Classification					
Shock (Endurance)	MIL-STD-202, Method 213, Condition J, 30 g 11 ms				
Sine Vibration (Endurance)	MIL-STD-202, Method 201 and 204, Condition A, except 5 g to 500 Hz, 1 sweep each axis				
Random Vibration (Endurance)	MIL-STD-202, Method 214, Condition I-D				
Humidity	MIL-STD-202, Method 103, Condition B, 100% rh				
Seal	MIL-STD-202, Method 112, Condition D				
Altitude	MIL-STD-202, Method 105, sea level to space				
Resistance to Soldering Heat	MIL-STD-202, Method 210, Condition A,B,C				
Terminal Strength	MIL-STD-202, Method 11, Condition C (5 bends at 45°, 2 lbs)				
Moisture Sensitive Level	1				
RoHS	6 (fully compliant) - no pure tin options available upon request, the device will be assigned a customer part number , not orderable through ordering codes				
Storage Temperature Range	-55		+125	°C	

Outline Drawing

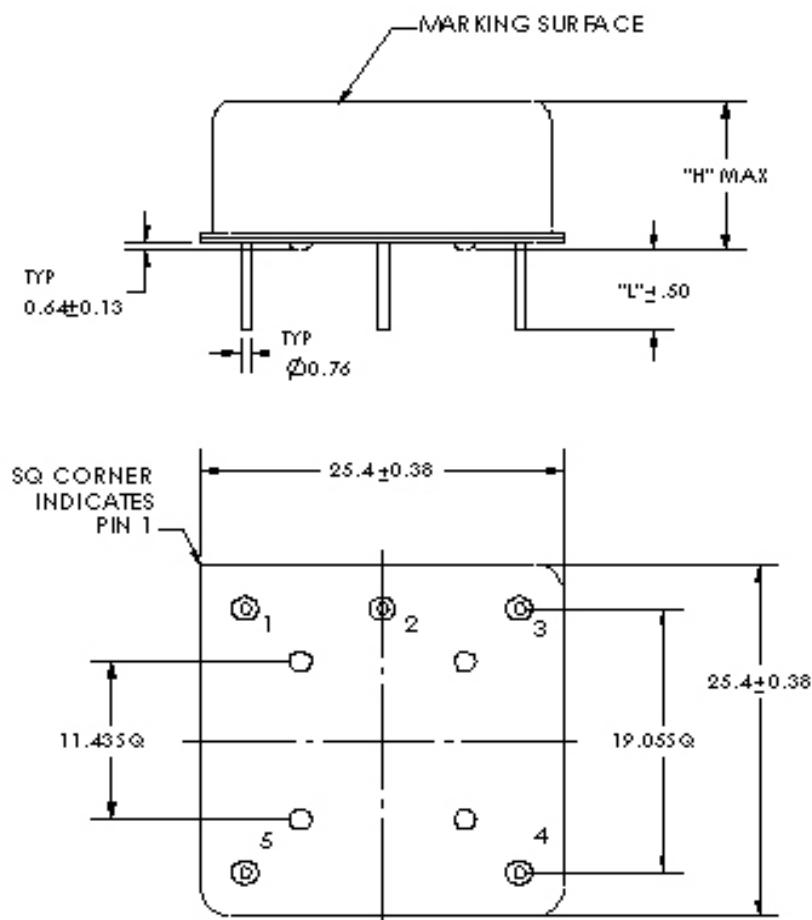

Code	Height "H"	Pin Length "L" Min
0	14.5	6.2
Pin Connections		
1	RF Output	
2	Ground (Case)	
3	Electronic Frequency Control Input (EFC)	
4	Reference Voltage	
5	Supply Voltage Input (VS)	

For Additional Information, Please Contact

USA:

Vectron International
267 Lowell Road
Hudson, NH 03051
Tel: 1.888.328.7661
Fax: 1.888.329.8328

Europe:

Vectron International
Landstrasse, D-74924
Neckarbischofsheim, Germany
Tel: +49 (0) 7268.801.100
Fax: +49 (0) 7268.801.282

Asia:

Vectron International
1F-2F, No 8 Workshop, No 308 Fenju Road
WaiGaoQiao Free Trade Zone
Pudong, Shanghai, China 200131
Tel: 86.21.5048.0777
Fax: 86.21.5048.1881

Disclaimer

Vectron International reserves the right to make changes to the product(s) and/or information contained herein without notice. No liability is assumed as a result of their use or application. No rights under any patent accompany the sale of any such product(s) or information.

Rev:6-25-12 dmc